



# Nokia Lumia 530 Touch screen, LCD Display Replacement

Nokia Lumia 530 Touch screen, LCD Display Replacement

Written By: ZFix



## INTRODUCTION

Nokia Lumia 530 - RM-1017, RM-1019

How to disassemble / take apart the phone and change broken Display or Touch screen Glass Digitizer.

\_\_\_\_\_ **Video tutorial:** \_\_\_\_\_

[video: <https://youtu.be/9soHb68hF8g>]



---



### TOOLS:



- [T5 Torx Screwdriver](#) (1)
  - [T6 Torx Screwdriver](#) (1)
  - [Tweezers](#) (1)
  - [Spudger](#) (1)
  - [3mm adhesive tape](#) (1)
  - [iFixit Opening Picks set of 6](#) (1)
-

## Step 1 — Loudspeaker and Earpiece

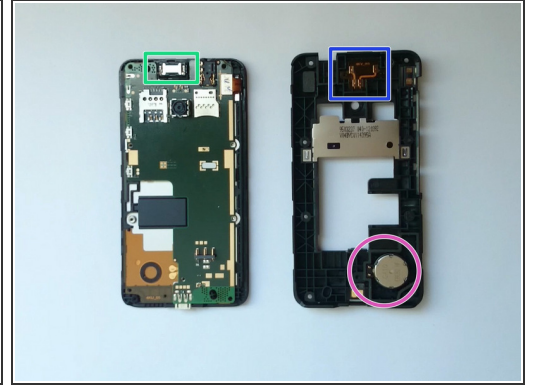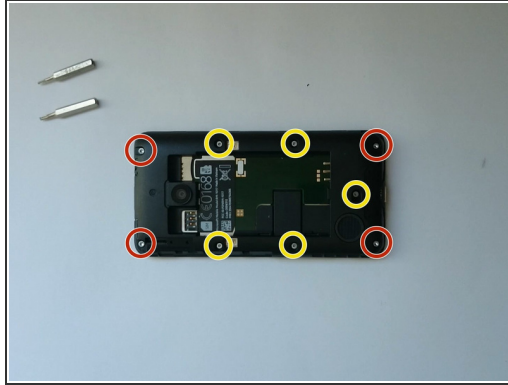


- Turn off the phone.
- Remove the battery and any installed SIM and memory cards. There are two tapes screws:
  - 4x Torx T6
  - 5x Torx T5
- Remove the middle bezel.
- Earpiece
- Earpiece Flex Cable
- Loudspeaker / Ringer

## Step 2 — Logic Board

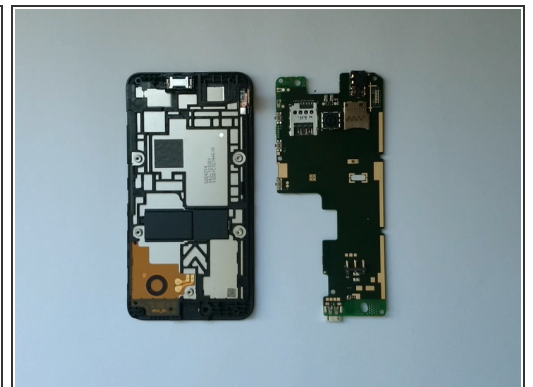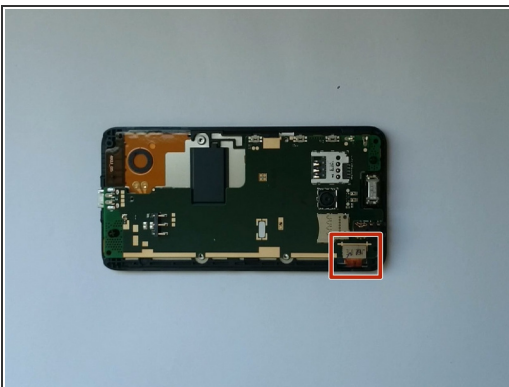

- Disconnect the touch screen & display flex cable.
- Remove the main board.

### Step 3 — Touch screen or LCD Display Replacement

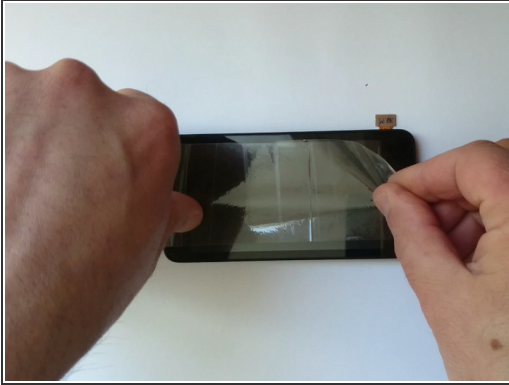

- If the glass is broken, put some scotch tape to prevent it break to pieces.
- Use a hot air to make adhesive tape more soften.
- ❗ For this operation you can use a hairdryer.
- Use a cutter and make small room to insert a plastic pick.



### Step 4



- Continue with the separation by using a plastic tools.
- ❗ If necessary, use the hot air again





## Step 5

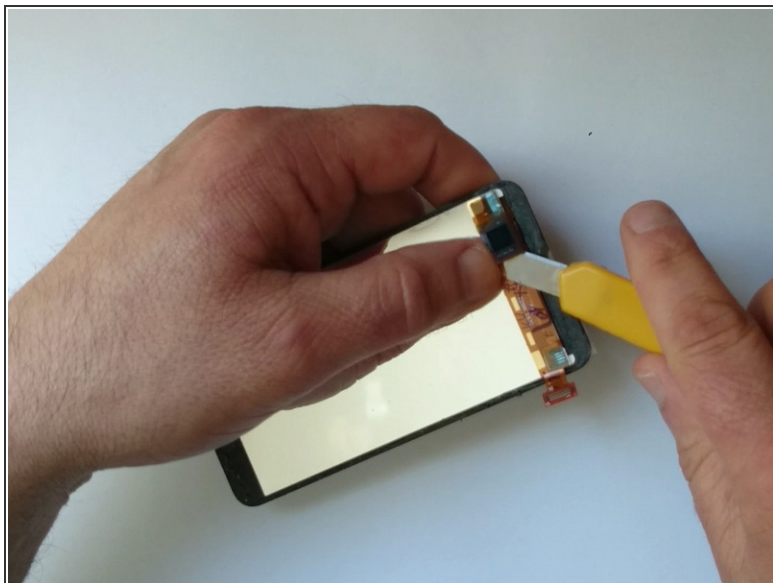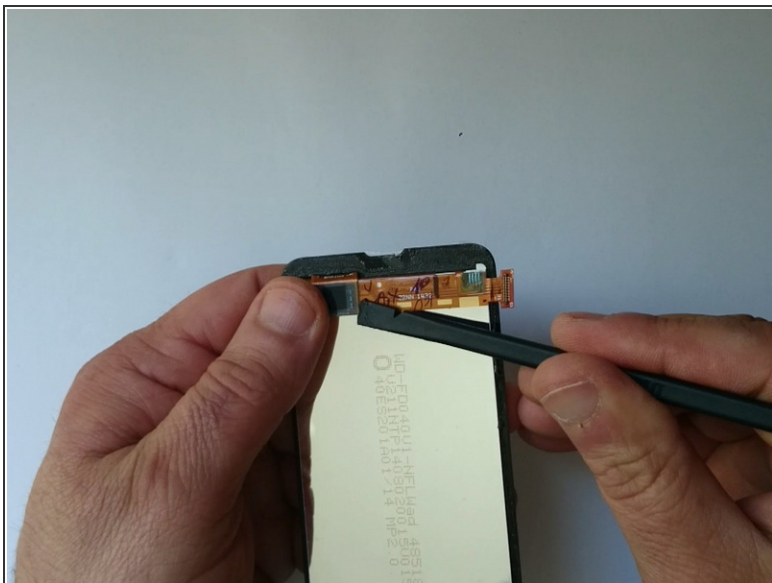

- Unstuck the Touch screen flex cable from the display.

**i** If you have a broken glass, you can cut the touch screen flex cable, otherwise unsolder it carefully in the next step.


## Step 6

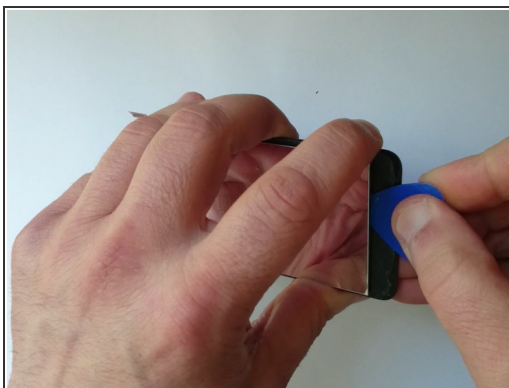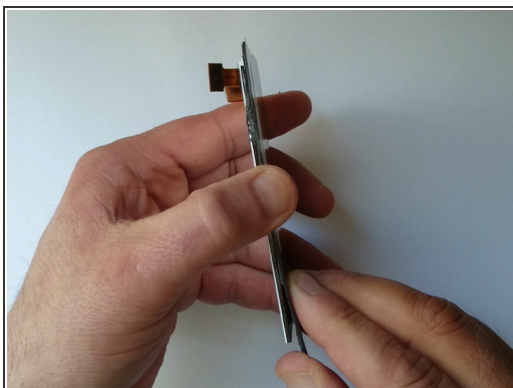

- The display edges are glued to the glass with adhesive tape.

**!** Use only thin plastic tools for the separation.

## Step 7

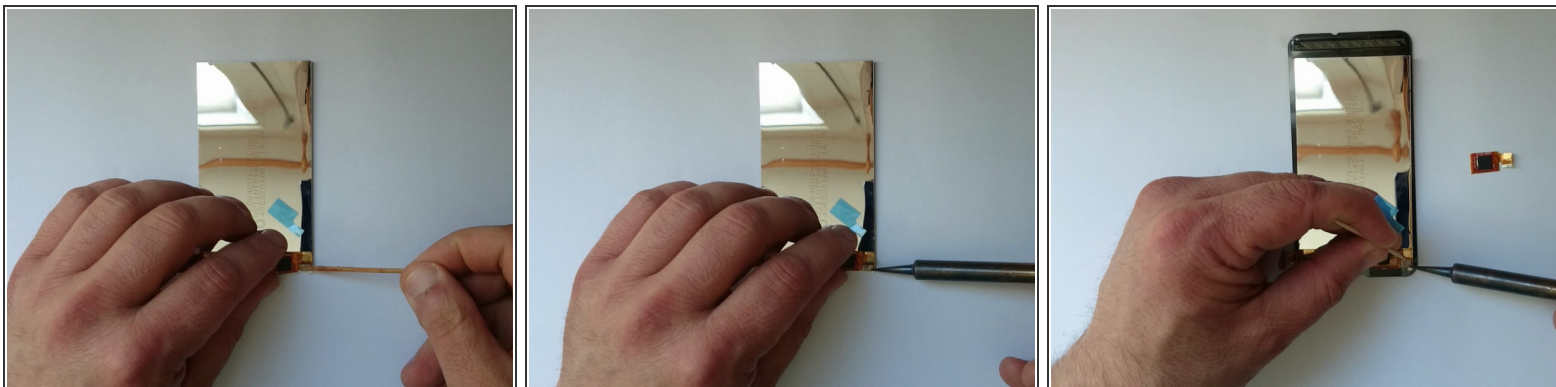

- Remove the blue sticker.
- With a soldering iron, remove the touch screen flex cable and install the new one.


⚠ Put back the blue sticker.

## Step 8



- If the spare part is without tape, install a new one.
- Carefully put the display in place, then install the glass.
- Start with reassembling.

## Step 9

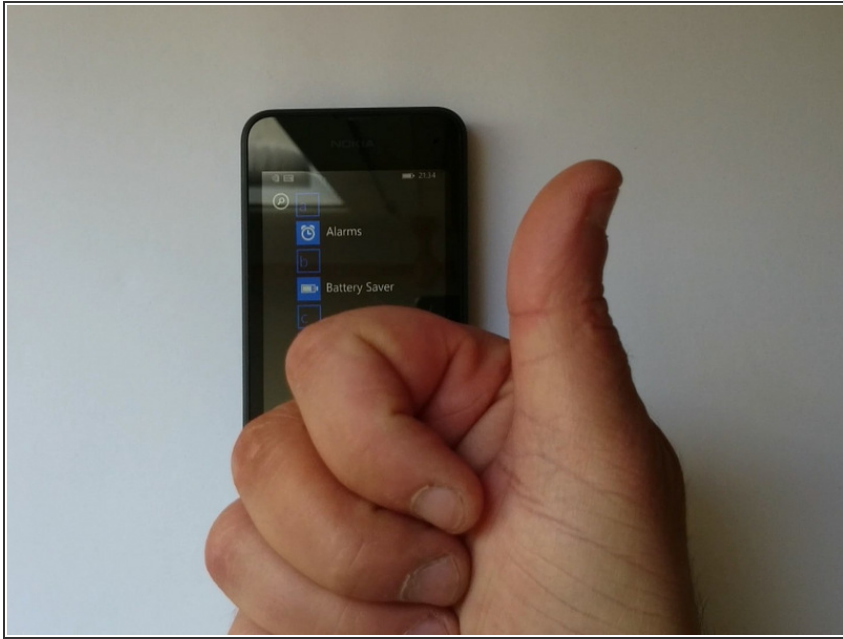

- That's all.
- .
- .
- .
- .
- .
- **Did you do it successfully?**

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 05:32:07 AM.